



MZH 3042 | MZH 3062 | MZH 3072

Goosenecks for ME 34 | ME 35 | ME 36 microphone heads



MZH 3072 MZH 3062 MZH 3042

The MZH 3042, MZH 3062 and MZH 3072 are metal goosenecks with two flexible sections for use with the ME 34, ME 35 and ME 36 microphone capsules. The rugged, matte black goosenecks are fitted with a balanced, floating XLR-3 output, enabling the microphone to be powered from 12 – 48 V phantom power.

FEATURES

- Sturdy and elegant metal gooseneck for unobtrusive miking
- RF shielding against intermodulation from wireless equipment/devices

PRODUCT VARIANTS

MZH 3042	Art. no. 009384
MZH 3062	Art. no. 500652
MZH 3072	Art. no. 500653

ACCESSORIES

Microphone heads:		
ME 34	black	Art. no. 005060
ME 34 W	white	Art. no. 005061
ME 35	black	Art. no. 005062
ME 35 W	white	Art. no. 005063
ME 36	black	Art. no. 005064
ME 36 W	white	Art. no. 005065
MZT 30	installation XLR 3F connector	Art. no. 005085
MZS 31	shockmount	Art. no. 005087

SPECIFICATIONS

Connection	XLR 3
Phantom power	P12 - P48 V
Coating	matte black
Diameter	MZH 3042: 6 mm MZH 3062: 8 mm MZH 3072: 8 mm
Number of flexible elements	2
Length	MZH 3042: 400 mm MZH 3062: 600 mm MZH 3072: 700 mm
Weight	MZH 3042: 110 g MZH 3062: 130 g MZH 3072: 135 g

ARCHITECT'S SPECIFICATION

The unit shall be streamlined in appearance, with a boom diameter of 8 mm (.31"), an overall length of 40 cm (15.75"), 60 cm (23.6"), or 70 cm (27.5"), and a double bend to facilitate precise positioning. It must also be finished with a durable anti-reflective matte black coating and have a pre-amp housed within its XLR-3 connector housing. The unit must be mountable using a table stand, direct to surface receptacle or via a silent shock mount system. The unit shall accept the ME34, ME35 and ME36 microphone capsules.

The unit shall be a Sennheiser MZH 3042.

The unit shall be a Sennheiser MZH 3062.

The unit shall be a Sennheiser MZH 3072.




MZH 3042 | MZH 3062 | MZH 3072


Goosenecks for ME 34 | ME 35 | ME 36 microphone heads

DIMENSIONS

MZH3042

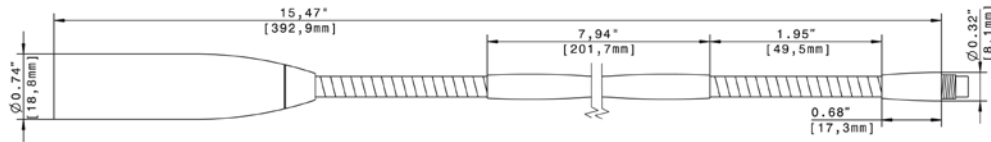

MZH3062

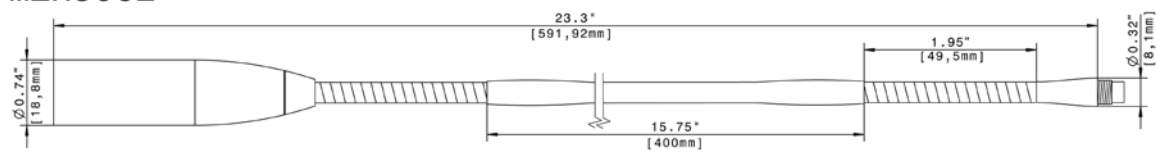

MZH3072

