

# H.264 Compressed Video over IP Decoder, PoE, SFP, HDMI, USB for Record

NMX-DEC-N3232 (FGN3232-SA), Stand Alone

NMX-DEC-N3232-C (FGN3232-CD), Card



## Overview

The N3000 Series H.264 compression engine delivers low-latency 1080p60 video at half the bandwidth of comparable encoders. High profile H.264 encoders output unicast or multicast to one or more N3000 Series decoders with the same seamless switching capability as the N1000 and N2000 lines. Multiple selectable streaming protocols (RTP, RTSP, and more) allow for software endpoints during video to the desktop applications or third-party hardware endpoints like Roku, Amino, or Google TV. Adjustable bit-rates from 32-Kbps to 10-Mbps give the highest video fidelity at the lowest bandwidths on the market in keeping with SVSI's commitment to provide unsurpassed Networked AV quality.

The N3000 Video over IP Series extends the reach of SVSI's Networked AV solutions to the WAN for streaming, video to desktop, digital signage, set-top boxes, or mobile devices applications. Fully integrated with existing Networked AV control options, the N3000 Series delivers the highest quality HD video content at the lowest bandwidth for the most demanding applications. Moving video to or from the Cloud just became a lot easier with the N3000.

H.264 decoder Includes IR, serial, balanced audio, RJ45 and 1GB SFP (fiber or copper) network connections. Digital video output only. H.264 decoder card requires NMX-ACC-N9206 cage.

### Common Applications

- The NMX-ENC-N3232 is the perfect solution for quality streaming over low bit rate WAN. Common applications include distance education, Multi-Site Enterprise, and IPTV Streaming.

### Features

- **Input and Output Scaling** – Video scaling at either input or output allows seamless switching from any source, at any resolution, to any display or projector, while preserving video fidelity.
- **Power Over Ethernet (PoE)** – Eliminates requirement for local power supply and speeds installation. Units can still be powered locally from 12VDC allowing for easy rack-mountable, high-density installations.
- **Infrared (IR)** – Infrared emitter connection allows control of low-cost, IR-only display devices.
- **Onboard Control** – All N-Series encoders and decoders have on-board, built-in control capability via events that can trigger any number of TCP/UDP commands to other IP controllable devices.
- **Unlimited Scalability**
- **Stand Alone or Card** – Available as a stand alone device, or card for use with NMX-ACC-N9206.

### Specifications

VIDEO	
Video Input	Network video over copper via RJ45 port or fiber via 1G SFP port
Video Output	HDMI, DVI-D (through adapter)
Formats	HDMI, DVI-D (through adapter), HDCP content protection support
Input Resolutions	Supports most common HD up to 1080p60. See website for all supported resolutions.

AUDIO	
Input Signal Types	Network audio over Ethernet
Output Signal Types	Embedded audio on HDMI or DVI-D (through adapter)
HDMI Audio Formats	Stereo 2-channel
Analog Audio Format	Stereo 2-channel

LATENCY	
Latency	175 ms at 60 fps
Note:	<ul style="list-style-type: none"> <li>• This is the combined encode plus decode latency. Total latency from source to screen will also include any network latency.</li> <li>• Scaling adds one frame of latency (17ms at 60fps)</li> </ul>

COMMUNICATIONS	
Ethernet	P0 10/100/1000 Mbps, auto-negotiating, auto-sensing, full/half duplex, DHCP, Auto IP, and Static IP  P1 1 Gbps port which accepts compatible fiber transceivers or direct attach cables (fiber or copper cabling)
HDMI	HDCP, EDID management

PORTS	
+12V 2A	One 12 Volt DC power input

P0	<p>8-wire RJ45 female</p> <p>10/100/1000 Mbps 10/100/1000Base-T auto-sensing gigabit Ethernet switch port</p> <p>Provides the network connection, network AV video, and power to the Encoders and Decoders</p>
P1	<p>SFP port (SFP fiber transceiver or direct attach cable not included)</p> <p>Provides the network connection and network AV video</p>
IR	<p>2-pin terminal Phoenix connector</p> <p>Provides Infrared (IR) output only (33-60 kHz; typically 39 kHz). Emitter may be necessary (not included)</p>
RS232	<p>3-pin terminal Phoenix connector</p> <p>Provides a serial control interface. Full duplex communication. Available terminal speed settings: 1200-115200 baud rate</p>
AUDIO	<p>5-pin terminal Phoenix connector</p> <p>Provides user-selectable balanced/unbalanced output. Dedicated audio output</p>
HDMI OUT	HDMI video output
USB connector (front panel)	One USB-A – Inactive

CONTROLS AND INDICATORS – FRONT PANEL	
RESET Button	<p>Recessed pushbutton</p> <p>Press to initiate a 'warm restart' causing the processor to reset, but not lose power. A reset does NOT affect the current settings</p>
ID Button	<p>Recessed pushbutton</p> <p>Press to send a notification out on the network to identify the unit (the notification causes a pop-up dialog in N-Able and N-Command)</p>
POWER LED	<p>On solid (green) when operating power is supplied (via PoE or local power supply)</p> <p>This activity is also shown by the <b>PWR</b> LED on the rear panel</p>
STATUS LED	<p>On flashing (green) when there is software activity</p> <p>This activity is also shown by the <b>STAT</b> LED on the rear panel</p>

CONTROLS AND INDICATORS – REAR PANEL	
PWR LED	Same as <b>POWER</b> LED described above
HDMI LED	On (green) when there is a connection to a valid display
STAT LED	Same as <b>STATUS</b> LED described above
STRM LED	On (green) when the unit is streaming video

POWER SUPPLY	
Power Supply, External, Optional	2.0 Amp @ 12 Volts DC; 100-240 Volts AC power supply; optional. NMX-ACC-N9312 (FGN9312)
Power over Ethernet (PoE), External, Optional	Can be powered via a PoE switch or other equipment with a PoE source. Conforms to IEEE 802.3af Class 3 (802.3at Type 1)
Note	<p>In order for the unit to receive Power over Ethernet (PoE), it must be connected to a switch or other equipment that has a PoE PSE (Power Sourcing Equipment) port.</p> <p>Warning: Do not run wiring that is connected to a PoE PSE port outside of the building where the PSE resides. It is for intra-building use only. PoE does not pass through the daisy chain (P1) port.</p>

ENVIRONMENTAL	
Temperature	32° to 104°F (0° to 40°C)
Humidity	10% to 90% RH (non-condensing)
Heat Dissipation	Up to ~44 BTU/hr


GENERAL	
Dimensions (HWD)	1.05" x 7.888" x 5" (2.67 cm x 20.04 cm x 12.7 cm)
Weight	1.54 lbs (0.7 kg)
Mounting Options	<p>Stand alone, surface mount, wall mount, or rack mount</p> <p>Surface and wall mounting requires (not included):</p> <ul style="list-style-type: none"> <li>•NMX-ACC-N9101 (FGN9101), Mounting Wings for SVSI N-Series Encoders and Decoders</li> </ul> <p>Rack mounting requires one of the following (not included):</p> <ul style="list-style-type: none"> <li>•NMX-ACC-N9102 (FGN9102), 1RU Rack Shelf for Two Side-by-Side for SVSI N-Series Encoders and Decoders</li> <li>•NMX-ACC-N9206 (FGN9206), 2RU Rack Mount Cage with Power for Six SVSI N-Series Card Units</li> </ul>
Regulatory Compliance	FCC, CE, and NTRL
Recommended Accessories	<ul style="list-style-type: none"> <li>•NMX-ACC-N9312 (FGN9312), Power Supply 12V External</li> <li>•NMX-ACC-N9382 (FGN9382), 1RU Power Supply 16-Channel 12V for up to 16 SVSI N-Series Encoders and Decoders</li> <li>•NMX-ACC-N9101 (FGN9101), Mounting Wings for SVSI N-Series Encoders and Decoders</li> <li>•NMX-ACC-N9102 (FGN9102), 1RU Rack Shelf for Two Side-by-Side SVSI N-Series Encoders and Decoders</li> <li>•NMX-ACC-N9206 (FGN9206), 2RU Rack Mount Cage with Power for Six SVSI N-Series Card Units</li> </ul>

## NMX-DEC-N3232 Front View



- 1) USB-A audio/video stream recording input
- 2) Device reset button
- 3) Device ID discovery button
- 4) Power/Status indicators

## NMX-DEC-N3232 Rear View

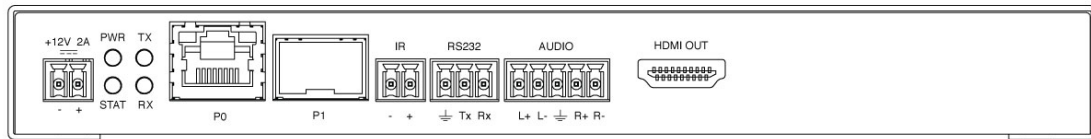

- 1) 12VDC Input
- 2) Status Indicators
- 3) RJ-45 auto-sensing gigabit Ethernet switch port
- 4) SFP fiber connector
- 5) Infrared (IR) emitter connection
- 6) RS232 connection
- 7) Analog Audio Input connection
- 8) HDMI Video Output

### About AMX by HARMAN

Founded in 1982 and acquired by HARMAN in 2014, AMX® is dedicated to providing AV solutions for an IT World. AMX solves the complexity of managing technology with reliable, consistent and scalable systems comprising control, video switching and distribution, digital signage and technology management. AMX systems are deployed worldwide in conference rooms, classrooms, network operation/command centers, homes, hotels, entertainment venues and broadcast facilities, among others. AMX is part of the HARMAN Professional Group, the only total audio, video, lighting, and control vendor in the professional AV market. HARMAN designs, manufactures and markets premier audio, video, infotainment and integrated control solutions for the automotive, consumer and professional markets. Revised 3.21.16. ©2016 Harman. All rights reserved. Specifications subject to change.

www.amx.com | +1.469.624.7400 | 800.222.0193