



SpeechLine Digital Wireless

SL PASC 4 | Passive antenna splitter/combiner



FEATURES

- 1880 - 1930 MHz (DECT range)
- 8 RF outputs for connecting up to 4 SL Rack Receiver DW
- 2 RF inputs to connect AWM 2 or AWM 4
- SMA-R connectors
- Passive antenna splitter/combiner

The SL PASC 4 is a passive 4-way True Diversity antenna splitter/combiner for the SpeechLine Digital Wireless microphone series. It is used to distribute the antenna signals of up to 4 SpeechLine Digital Wireless links. This reduces the number of required antenna cables to a minimum when the AWM 2 or AWM 4 remote antennas are used. The rack receivers are connected to the SL PASC 4 using the supplied SMA-R cables.

SPECIFICATIONS

Frequency range	1,880 - 1,930 MHz
Insertion loss	-8 dB typ.
Port to port isolation	26 dB min.
Input / Output return loss	-14 dB max.
Connectors	AC coupled ports
Max. input power	1.5 W
Dimensions	210 x 160 x 41 mm
Weight	663 g
Operating temperature	-40 to 85 °C
Relative humidity	max. 95 % (non-condensing)

DELIVERY INCLUDES

- SL PASC 4 passive antenna splitter/combiner
- 8x SMA-R cable (50 cm)
- Quick guide
- Safety guide

PRODUCT VARIANTS

SL PASC 2	2-way splitter	Art. No. 390040
SL PASC 4	4-way splitter	Art. No. 390041


ACCESSORIES

AWM 2	Wallmount antenna	Art. No. 505981
CL 5	Antenna cable 5 m	Art. No. 505976
CL 10	Antenna cable 10 m	Art. No. 506263
CL 20	Antenna cable 20 m	Art. No. 506264
AWM 4	Wallmount antenna	Art. No. 507358
CL 1 PP	Antenna cable 5 m	Art. No. 507425
CL 5 PP	Antenna cable 5 m	Art. No. 507426
CL 10 PP	Antenna cable 10 m	Art. No. 507427
CL 20 PP	Antenna cable 20 m	Art. No. 507428
GA 4	Rackmount set	Art. No. 505977



SpeechLine Digital Wireless SL PASC 4 | Passive antenna splitter/combiner

CONNECTION

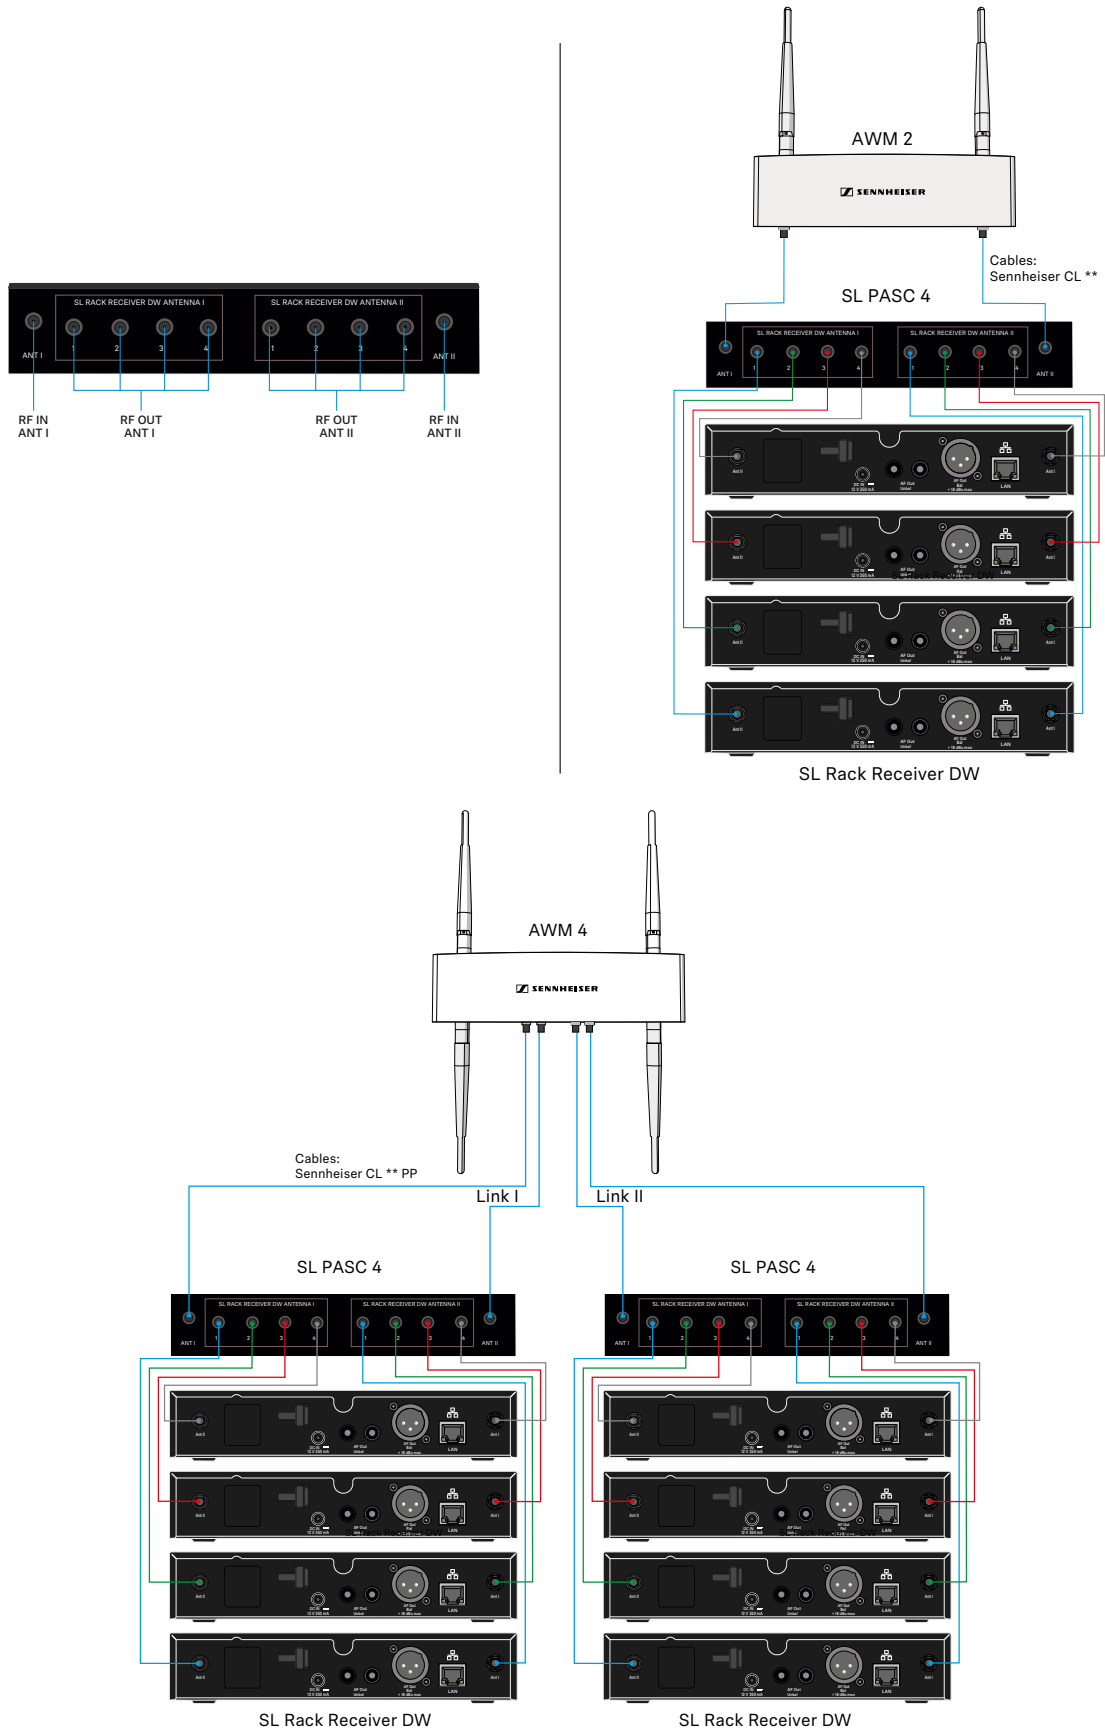



SpeechLine Digital Wireless

SL PASC 4 | Passive antenna splitter/combiner

DIMENSIONS

