

OIP-D40E 1G AVoIP Encoder



Front View



Rear View

OIP-D40D 1G AVoIP Decoder



Front View




Rear View

The Lumens® OIP-D40E / OIP-D40D AV over IP encoder and decoder deliver 1080p ultra-low latency and visually lossless compression through Cat. 5e/6/7 cables. The OIP-D40E / OIP-D40D provides flexible, high-efficient and cost-effective Pro A/V system solutions. It is applicable for a wide range of environments, such as sports bars, school campuses, and house of worship, etc.

Key Features

- Delivers 1080p pristine video quality with ultra-low latency
- Long-distance IP-based A/V transmission
- Video wall deployment with portrait and landscape orientation
- Intuitive Web-based GUI for AV distribution and control *with OIP-D50C
- Entry-level A/V distribution solution

System Diagram

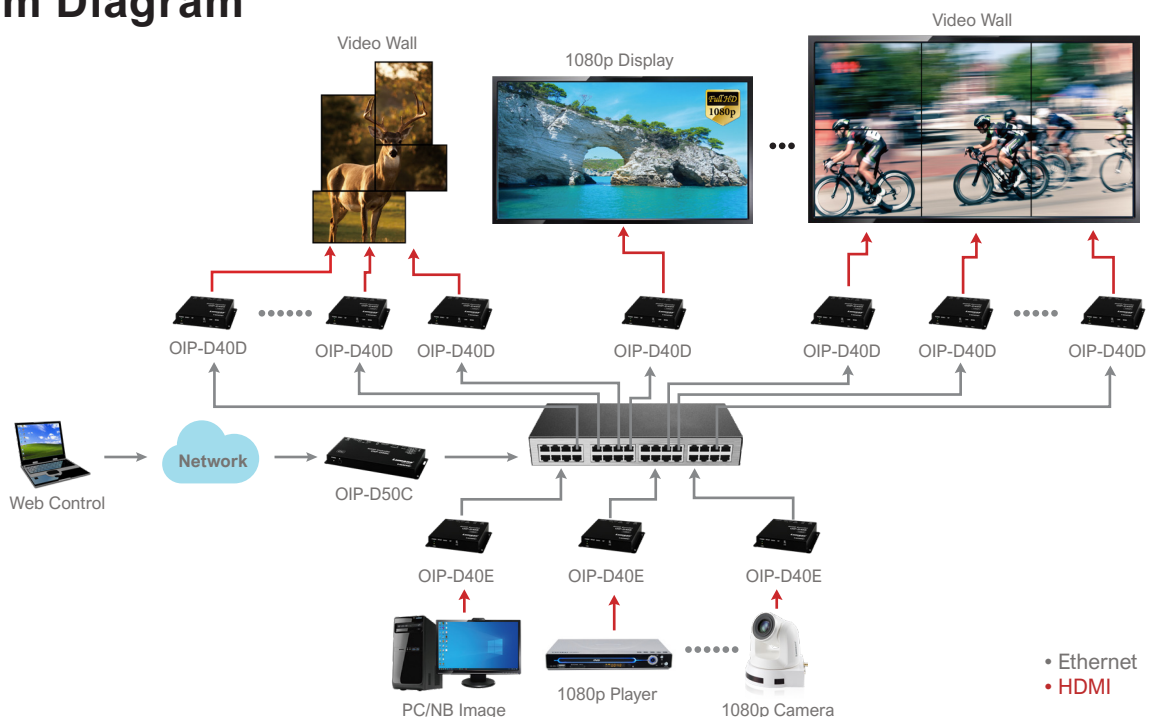

• Ethernet
• HDMI

Specifications



INTERFACE	OIP-D40E	OIP-D40D
Input	1 HDMI 1.4 (DVI 1.0)	1 GbE LAN (RJ-45)
Output	1 GbE LAN (RJ-45)	1 HDMI 1.4 (DVI 1.0)
Control	1 IR Extender (3.5mm)	1 IR Extender (3.5mm)
	1 IR Blaster (3.5mm)	1 IR Blaster (3.5mm)
	1 RS-232 (DB-9)	1 RS-232 (DB-9)
VIDEO		
HDCP	1.4	1.4
Input Signal Type	1080p 12bit RGB 1920×1200p@60RGB	NA
Output Signal Type	NA	1080p 12bit RGB
Maximum Input	HDMI 1920×1080p@60 1920×1200p@60RGB	Stream 1920×1080p@60 1920×1200p@60RGB
Maximum Output	Stream 1920×1080p@60 1920×1200p@60RGB	HDMI 1920×1080p@60 1920×1200p@60RGB
AUDIO		
HDMI	LPCM (8 Channels) / Bitstream / HD Bitstream	LPCM (8 Channels) / Bitstream / HD Bitstream
POWER		
Power Supply	5V/2.6A DC (Locking)	5V/2.6A DC (Locking)
Power Consumption	5.17W	4.2W
ENVIRONMENTAL		
Operating Temperature	0°C ~ 40°C	0°C ~ 40°C
Operating Humidity	20~80%, non-condensing	20~80%, non-condensing
Storage Temperature	-40°C ~ 60°C	-40°C ~ 60°C
Storage Humidity	90%, non-condensing	90%, non-condensing
ENCLOSURE		
Housing	Metal	Metal
Weight	0.802lbs (0.364kg)	0.802lbs (0.364kg)
Dimensions (W×H×D)	Case Only: 5.03" x 0.98" x 4.25" (128mm x 25mm x 108mm) All Inclusive: 5.03" x 0.98" x 4.57" (128mm x 25mm x 116mm)	Case Only: 5.03" x 0.98" x 4.25" (128mm x 25mm x 108mm) All Inclusive: 5.03" x 0.98" x 4.57" (128mm x 25mm x 116mm)



Lumens Integration, Inc.
4116 Clipper Court
Fremont, CA, 94538
Phone : +1-866-600-0988
Fax : +1-510-252-1389

Lumens Europe
De Nayerstraat 17 9470
Denderleeuw Belgium
Phone : +32-473-58-38-95
Fax : +32-2-452-76-00



www.MyLumens.com