



User Manual

EXT-H101L-HDBT

Ultra-thin HDMI2.0 Extender

131ft/40m 4K UHD

All Rights Reserved

Version: EXT-H101L-HDBT_2019V1.0

Statement

Read this user manual carefully before using this product. Pictures shown in this manual is for reference only, different model and specifications are subject to real product. This manual is only for operation instruction only, not for any maintenance usage. The functions described in this version are updated by December 2019. In the constant effort to improve our product, we reserve the right to make functions or parameters changes without notice or obligation. Please refer to the dealers for the latest details.

Safety Precaution

To ensure the best performance, please read all instructions carefully before using the device. Save this manual for further reference.

- Follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- Do not dismantle the housing or modify the module to avoid electrical shock or burn.
- Using supplies or parts not meeting the products specifications may cause damage, deterioration or malfunction.
- Do not expose the unit to rain, moisture or install this product near water.
- Install the device in a place with good ventilation.
- Do not twist or pull by force ends of the cable. It can cause malfunction.
- Do not use liquid or aerosol cleaners to clean this unit. Always unplug the power to the device before cleaning.
- Unplug the power cord when not used for a long period of time.
- Refer all servicing to qualified service personnel.

Customer Service

We provide limited warranty for the product within **three years** counting from date of purchase (The purchase invoice shall prevail).

Package List

- | | |
|----------------------------------|-------------------------------|
| ▪ 1 x Transmitter | ▪ 1 x Receiver |
| ▪ 4 x Mounting Ears & 4 x Screws | ▪ 8 x Plastic Cushions |
| ▪ 1 x RS232 Cable | ▪ 1 x 3-pin Phoenix Connector |
| ▪ 1 x Power Adaptor (12VDC, 2A) | ▪ 1 x User Manual |

Introduction


The EXT-H101L-HDBT is an ultra-thin HDMI2.0 Extender consist of a transmitter and a receiver. It extends 1080p/4K HDMI signal over CAT5e/CAT6a cable up to 70m /40m (PoC) and enables IR and RS232 pass-through to control source or display device remotely. It also adapts a visually lossless video compression technology to ensure the HD lossless transmission of HDR and 4K@60Hz/4:4:4 over CAT5e/CAT6a cable.

Features

- Supports 4K/UHD/60Hz/4:4:4.
- Supports HDMI2.0 & HDCP2.2 and is backward compatible with previous versions.
- Maximum transmission distance is up to 40m for 4Kx2K, and 70m for 1080p.
- Supports CEC, IR and RS232 pass-through for long-distance control.
- Supports bi-directional PoC for simplified wiring.
- Supports HDR.
- Features DIP switch for choosing mode from: Control, Update A, Update B.

Ultra-thin HDMI2.0 Extender

Panel Description

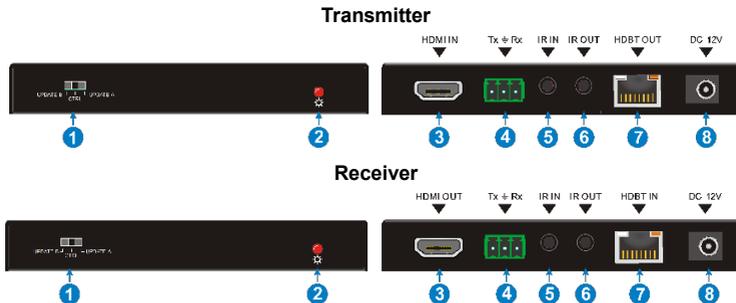

No.	Name	Description
①	MODE Switcher	<ul style="list-style-type: none"> CTRL: RS232 pass-through control mode. UPDATE A: Update Valens IC program, connect a PC to the RS232 port, and then double-click the update file (.bat). UPDATE B: Update compression IC program, the upgrade method is the same as the above UPDATE A.
②	Power LED	RED: DC power present.
③	HDMI IN (Transmitter)	Connect to HDMI source.
	HDMI OUT(Receiver)	Connect to HDMI sink.
④	3-pin Terminal Block	If one end is connected to a control device (e.g. PC), and the other end should be connected to the third-party device that needs to be controlled.
⑤	IR IN	Works with far-end IR OUT port, connect to IR Receiver (with carrier) to receive IR signal to control far-end display device from local.
⑥	IR OUT	Works with far-end IR IN port, connect to IR Emitter to send IR signal to control input source device from remote.
⑦	HDBT OUT(Transmitter)	Connect to the HDBT IN socket on Receiver via CAT5e/6a cable.
	HDBT IN (Receiver)	Connect to the HDBT OUT socket on Transmitter CAT5e/6a cable.
⑧	DC Power Port	Support bi-directional PoC, either ports should be connected with 12V DC 2A power adaptor.

Ultra-thin HDMI2.0 Extender

Specification

Model Spec	Transmitter	Receiver
Input	HDMI IN	HDBT IN
Output	HDBT OUT	HDMI OUT
Control Ports	IR IN, IR OUT, RS232	IR IN, IR OUT, RS232
General		
Transmission Mode & Distance	HDBaseT; 1080p ≤ 70m; 4K×2K ≤ 40m	
Resolution	Up to 4K×2K@60Hz 4:4:4	
Bandwidth	18Gbps	
HDMI Standard	HDMI2.0 & HDCP2.2	
Power Consumption	14W (max)	
Operation Temperature	0 ~ +40°C	
Storage Temperature	-10 ~ +50°C	
Relative Humidity	0% ~ 90%	
External Power Supply	Input: 100VAC~240VAC, 50/60Hz; Output: 12VDC 2A	
Dimension (W*H*D)	115mm x 16 mm x 84mm	
Net Weight (g)	Transmitter: 150g; Receiver: 153g	

System Diagram

